

1834 PC PROGRAMMABLE TELEPHONE ENTRY SYSTEM



flush mount
shown with trim ring -
sold separately



surface mount



wall mount



big characters
half inch LCD display



stainless steel
plate and anti-vandal features
protects all internal parts



pc programmable
from your PC via modem
or RS-232 interface



large scroll
and call buttons

- Ideal for applications that do not require card access control or system expansion
- Visitors use the phone system to communicate with a resident who can grant or deny access via their own touch-tone telephone
- PC programmable system allows programming from a pc via modem or RS-232 interface. DKS Remote Account Manager and Transaction Analysis software included
- Live Transactions allows you to view activity as it happens directly on your computer display
- Large A and Z scroll buttons and one touch CALL button makes system operation quick and easy
- Prewired for postal switch

FEATURES




ACCESS CONTROL SOLUTIONS





1834 PC PROGRAMMABLE TELEPHONE ENTRY

The Model 1834 is an ideal telephone entry system that is suited for large applications that have a separate access control system, or in applications that require telephone entry access only. Visitors are easily identified by voice communication (a CCTV camera option provides visual ID as well*) and can be granted or denied access directly from a touch-tone telephone.

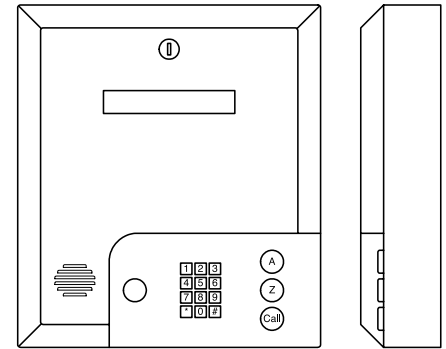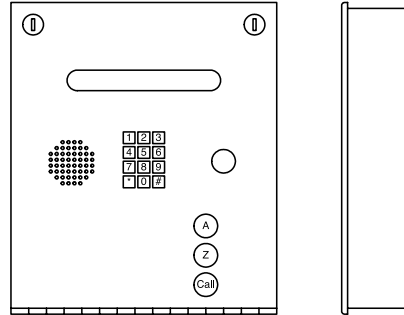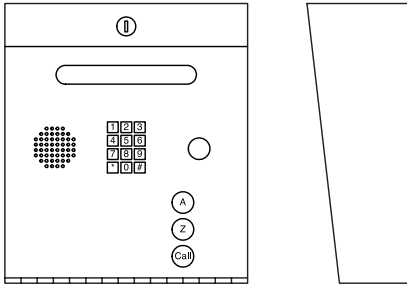

1834 Surface

11.25" W x 13" H x 4.75" D
285mm W x 330mm H x 120.6mm D

1834 Flush

12" W x 13.5" H x 2.5" D
305mm W x 343mm H x 63.5mm D

1834 Wall

13.25" W x 15" H x 3.5" D
336.5mm W x 381mm H x 88.9mm D

1834 Specs

Communication

True full duplex
Hands free
Optional handset (surface or flush mount only) (ADA compliant)

Display

Single line 20 character super-twist LCD - 1/2 inch characters

Mounting Styles

Surface mount - indoor or outdoor applications
Flush mount - indoor or protected area applications, requires flush mount kit
Wall mount - indoor or outdoor applications

Capacity

Max 3000 phone numbers, 255 area codes
8000 event transaction memory
4 digit entry codes, capacity same as telephone number memory

Door/gate control

Two doors and/or gates

Programming Methods

Program via dial-up modem or RS-232 interface (requires second transformer) with included programming and transaction analysis software
Other programming methods include system keypad and remotely from a touch tone telephone

Advanced Features

Full Duplex communication
Remote Account Manager software
Live Transactions (requires RS-232 connection)
Database import/export capability using CSV file format
Transaction buffer stores last 8000 events
Programmable directory codes can be set from 1 to 4 digits in length
10 & 11 digit dialing capability
Large A and Z scroll and CALL buttons
Built in clock/calendar
8 hold open time zones
Built in postal lock provision, EEPROM memory

Optional

Camera Ready:
Optional B&W or Color CCTV camera* can be added to the 1834
*may require additional CCTV equipment

Operating Temp

10°F to 145°F
-12°C to 62°C
Optional heater kit available for colder climates

Electrical Requirements

16 VAC, 20 VA System power (250ma)
two transformers are sent with unit, second transformer for RS232 power
U.L. listed power transformers provided
Ringer equivalence: 0.0A Jack Type: RJ11C or W

Safety Standards

FCC (US) DUF6VT-12874-OTF
DOC (CAN) 1736 4528 A
Complies with UL 294
ETL Listed

Shipping Weight

Approximately 15-20 lbs (6.8-9 kg)

Warranty

2 year limited factory warranty

Distributed by:

DOORKING®, INC.

120 Glasgow Avenue, Inglewood, California 90301 U.S.A. Tel: 310-645-0023 FAX: 310-641-1586 www.doorking.com

© 2005 All Rights Reserved. Product specifications may change without notice. Rev. 12/05

MEMBER:

