



ACCESS CONTROL SYSTEM



open
your security gate or garage door from the safety and convenience of your automobile



receiver options
allow the MicroCLIK system to be used in several different applications



compatible
with Homelink™ system



optional
visor clip to mount the transmitter in your vehicle

- Keychain transmitter provides long range (up to 75-ft.) remote operation of garage doors or vehicular access gates.
- Over 1,000,000 transmitter codes available.
- PROxmtrtm includes a built-in proximity card reader providing both RF and card access control into a single compact unit.
- Transmitters available with 1, 2 or 3 buttons.
- MicroCLIK RF controls may be used as a stand-alone access control system or can be interfaced with 26 or 31 bit weigand controllers.

FEATURES


ACCESS CONTROL SOLUTIONS






microCLIK® RF CONTROL ACCESS CONTROL

MicroCLIK RF controls are designed to provide convenience and security. MicroCLIK transmitters are factory coded to 1 of over 1 million available codes. These RF controls are ideal for single-family homes, gated communities, apartment complexes, business offices and industrial sites. MicroCLIK transmitter codes usually can be copied into the built-in transmitters found in many luxury automobiles; however we do not guarantee this commonality or functionality.

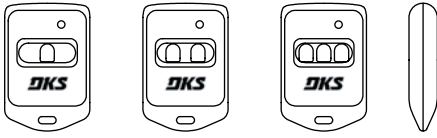

Transmitters

1.375" W x 2.5" H x .5" D
34.9mm W x 63.5mm H x 12.7mm D

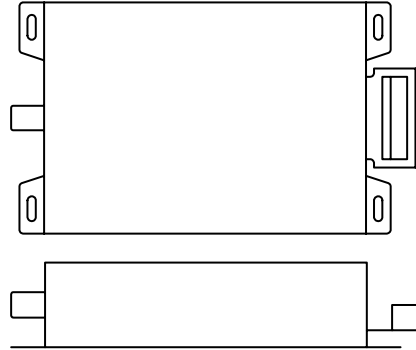

Receivers

3.675" W x 5.675" H x 1.25" D
93.3mm W x 144mm H x 31.7mm D

Specifications

Receiver Memory Capacity

Model 8057 Receiver: up to 16,000
Model 8059 Receiver: 80 maximum in stand-alone mode; unlimited in weigand output mode

Receivers

Model 8057:

Use for stand-alone applications
Can store up to 16,000 transmitter codes
Programming keypad built-in
Output is a form C dry contact relay
12-24 Volt, AC or DC

Model 8059:

Use as a weigand output receiver (26 or 31 bit) or as a stand-alone receiver (form C dry contact relay)
Stores up to 80 transmitter codes in stand-alone mode; unlimited in weigand output mode
Programs via the learn method; no keypad required
12-24 Volt, AC or DC

Transmitters

1,000,000 codes available
Available with 1, 2 or 3 buttons
PROXmitters include built in proximity access card
Powered with a 12-volt, type 23A battery (replaceable)

Features

1, 2 or 3 button transmitters available
Key ring included with transmitters
PROXmitters combine the MicroCLIK transmitter with a built in proximity tag
PROXmitters are available with DKS, AWID or HID proximity tag
Optional visor clips are available

Operating Temp

-10°F to 115°F
-23°C to 46°C

Electrical Requirements

Receivers - 12-24 volt AC or DC
Transmitters - 12 Volt type 23A battery

Output

Model 8057 Receiver: Form C dry contact relay (30 V, 1 Amp)
Model 8059 Receiver: 26 or 31-bit weigand (programmable)

Safety Standards

FCC (US): LSD8059RX
FCC (US): LSD8068T
DOC (CAN): 1736 102 138

Distributed by:

DOOR KING®, INC.

120 Glasgow Avenue, Inglewood, California 90301 U.S.A. Tel: 310-645-0023 FAX: 310-641-1586 www.doorking.com

© 2008 All Rights Reserved. Product specifications may change without notice. Rev. 11/08

MEMBER:

