

# Premium, UPS backup, Fast & Solar Residential & Commercial Slide Gate Operator



# SlideWinder®

*Simple. Reliable. Secure.*  HySecurity

## Keeps Running when Power Fails

SlideWinder's® unique UPS\* battery backup virtually guarantees that your gate operates normally (with access controls and safety equipment fully operational) for thousands of feet of gate travel after power loss.

\* uninterruptible power supply

## Fast & Solar

SlideWinder® 38 speeds gates at up to 24" / second and it is field adjustable. SlideWinder® 24 and 38 are available in efficient solar models.

## Whisper Quiet

Install SlideWinder® close to living spaces. SlideWinder® is ultra quiet.

## Clean Stainless Steel Cable Drive

No more rusty, ugly, dangling, grimy, open-to-the-elements, maintenance prone chain that's tough on gate hardware.

## Smart Touch Compatible

Fully integrated with all HySecurity operators. On-board diagnostics and troubleshooting, field programmable, and communicates tailgating and other security breaches to command and control software.


## Ultra Reliable

SlideWinder® comes with a 5-year limited warranty. It's rated for continuous duty. It meets the HySecurity standard of highest quality and reliability.




# SlideWinder® specifications


SlideWinder®, showing drum and cable-to-gate attachment. SlideWinder® features a non-slip, two cable drive system, preventing cable slippage. One cable winds on while the other winds off. SlideWinder® also features easy to set and precise limits. It always knows the position of its gate, even after AC power fails.

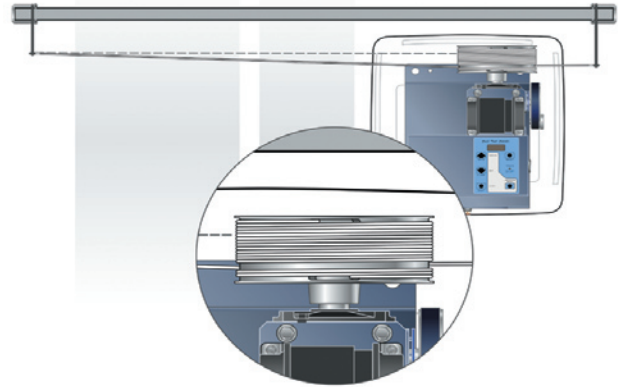


## Conduit Locations



Standard, no baseriser



12" base riser  
no extra batteries



12" base riser  
with heavy duty batteries



SlideWinder® 24 (std. and solar)  
1/2 hp; 12" / second  
125 lb. pull force  
1,200 lb. max gate weight  
24' max gate travel  
UL Class I - IV  
115/208/230 single phase  
50 or 60 Hz



SlideWinder® 38 (fast and solar)  
1 hp  
up to 24" / second (field adjustable)  
200 lb. pull force  
2,000 lb. max gate weight  
38' max gate travel  
UL Class I - IV (> 12" / sec, III & IV)  
115/208/230 single phase  
50 or 60 Hz

## Models

	1,200 lb. gates 12" / sec.	1,200 lb. gates 12" / sec.	<b>NEW! FASTER!</b> 2,000 lb. gates 9" / sec. to 24" / sec.	<b>NEW! FASTER!</b> 2,000 lb. gates 9" / sec. to 24" / sec.
<b>Model</b>	SlideWinder® 24	SlideWinder® 24S	SlideWinder® 38	SlideWinder® 38S
<b>Type</b>	Standard	Standard Solar	Heavy Duty	Heavy Duty Solar
<b>Duty Cycle</b>	continuous	continuous	continuous	continuous
<b>Horsepower</b>	1/2 hp	1/2 hp	1 hp	1 hp
<b>Drive</b>	small cable drum	small cable drum	large cable drum	large cable drum
<b>Gate Weight</b>	1,200 lb. gate max.	1,200 lb. gate max.	2,000 lb. gate max.	2,000 lb. gate max.
<b>Gate Length</b>	24 ft. max.	24 ft. max.	38 ft. max.	38 ft. max.
<b>Rate of Travel</b>	12" / sec.	12" / sec.	User adjustable	User adjustable
<b>1 Phase Power</b>	115/208/230 or 24V DC without modification	24V DC (Must use 2, 12 volt 110 AH batteries)	115/208/230 or 24V DC without modification	24V DC (Must use 2, 12 volt 110 AH batteries)
<b>UPS Backup Standard</b>	1,000 ft. gate travel after power loss std.	25,000 ft. gate travel after power loss std.	1,000 ft. gate travel after power loss std.	25,000 ft. gate travel after power loss std.
<b>UL Listing</b>	I, II, III, IV	I, II, III, IV	I, II, III, IV	I, II, III, IV