

THE SL-3000-UL-1HP™ SERIES SLIDE GATE OPERATORS



Modular Board – Uses LEDs to indicate all input and output functions of the gate operator.

ERD – If the gate hits a vehicle while closing, it reopens. If it hits a vehicle while opening, it stops, reverses 4 to 6 inches and stops again.

Digital Motor Protection – Entrapment sensor shuts off the motor after it reaches the stall amp for 3 seconds, reverses direction for several inches, and stops.

Electronic Inputs – Radio receiver, key switch, safety loop, center loop, telephone entry system, computer input, fire dept. key switch & 3-push-button station.

Timer – Adjustable timer can be set from 0 to 60 seconds.

Power Input On/Off Switch – Controls power input to the board with convenient switch.

Power Management – Board includes electronic power management with over current shutdown and automatic recovery.

Magnetic Lock – With Omni Option board, magnetic lock system is incorporated, allowing you to easily add the “MG1300” electromagnetic locking system to the gate.

Burglar Alarm – With Omni Option board, interfaces with existing home alarm or alarm output.

3 Push Button Control – On board gate operator control for close, stop, and open.

The SL-3000-UL-1HP is our most powerful slide gate operator. This operator was designed with heavy gates in mind. It delivers 210 pounds of pulling torque and is capable of 35 cycles per hour on gates up to 2000 pounds and 37 feet in length. Equipped with two 1/2 horsepower motors that motors and a heavy duty transmission. It is the perfect choice for large and heavy wrought iron gates.

The SL-3000 Series slide gate operators are used by high demand customers and are the most popular slide gate operators in the country. Users include large development and management companies, as well as prestigious residential gated communities / custom homes.

Electrical Specifications

Intelligent Master/Slave – Precise, synchronized movement and communication between two gate operators using 3 wire RS-485 bi-directional technology.

Spike Suppressors – 20,000 Amps and near lightning protection with modular omni surge suppressor. Initial response time: 0.00000000001 seconds.

Alternate Outputs – With Omni Option Board 3 push button command control, burglar alarm input and output. QCC Option is available.

Gate Traveling Time – Adjusted by a precision mechanical device and electrical limit switch system.

Soft Stop – Gate travels through the cycle at normal speed and comes to a stop slowly for more accurate gate cycle. Equipped with integrated time delay for long mechanical life expectancy.

Integrated Loop Detectors – Easy to install, modular, plug in loop detector inputs for exit loop, center loop, and safety loop.

120 VAC Power – Built-in 120 VAC power receptacle (NEMA 5-15).

Motor Drive – Solid-State electronic motor drive system is incorporated into board.

Safety Alarm – If the gate hits an object twice while opening or closing, the system will shut down and alarm will sound for five minutes. After five minutes the system will automatically reset itself. To reset the system during the five minutes, a manual reset button must be used.



THE SL-3000-UL-1HP™ SERIES SLIDE GATE OPERATORS

Elite's operators are skillfully crafted in the USA. Every unit is carefully inspected both electronically and mechanically to provide the quality expected. Elite uses computer aided design to assure the most precise fit for their operator components. High quality and years of proven reliability places Elite SL Series slide gate operators ahead of the competition.

•#41 chain is guided by two slotted UHMW rollers which prevent the chain from slipping off of the drive sprocket, thereby requiring less maintenance.

•The SL Series use a solid steel, machined pulley and notched v-groove belt for highly efficient torque transfer from motor to gear reducer.

•The SL-3000-UL-1HP™ uses two, 1/2 hp instant reversing parking gate motors that work in conjunction, equalling 1 hp.

•A highly efficient, extremely quiet, 30 to 1 worm gear reducer is used.

Limit switch device with high speed ball bearings

Modular Omni Control Board

Gold zinc plating

High density polyethylene plastic cover



Heavy duty, 30:1 ratio gearbox lubricated in and oil bath

Two 1/2 HP instant reversing motors

1/4" sheet metal chassis

Mecanical Specifications

Chassis – Constructed with 1/4" sanded, welded, and gold zinc plated sheet metal.

Worm Gear Reduction – 30-to-1 worm gear reduction in an oil bath.

Motor – Equipped with two, 1/2 hp instant reversing parking gate motors that work in conjunction, equalling 1 hp.

Cover – High density polyethylene plastic for excellent heat and corrosion resistance.

Finishing – All metal parts are gold zinc plated for rust proof protection.

Weight – 139 lbs. Shipping – 157 lbs.

Emergency Release – Hand crank is standard.

Cycles – 35 cycles per hour with 36' gate

Output Shaft – 1" cold rolled steel.

Capabilities – Maximum gate length 37'.
Maximum gate weight 2000 lbs.

Gate Traveling Speed* – 12" per second average.


Dimensions – L18" X W19" X H25"

Approval – ETL and UL Listed and compliant to UL325 and UL991 standards.



THE SL-3000-UL-1HP™ SERIES SLIDE GATE OPERATORS

FEATURES OF THE SL-3000-UL-1HP™ SLIDE GATE OPERATOR





LIMIT SWITCH SYSTEM

The SL-3000-UL™ series are manufactured with a precision limit switch system. This system uses high speed ball bearings and high quality components for efficiency.



REVERSING SENSOR

The digital current sensor continuously monitors the motor current. It can be set for both the opening and closing cycles. If the gate is closing and hits a vehicle, the sensor detects the increased load on the motor and reverses. If the gate is opening and hits a vehicle, it stops and reverses 4 to 6 inches. The sensor is smart enough to operate on off-level installations and not to react to wind resistance.

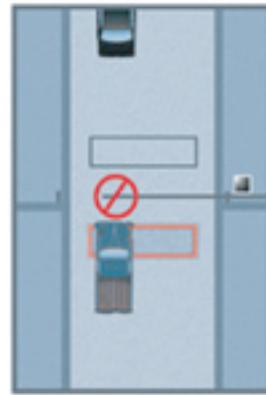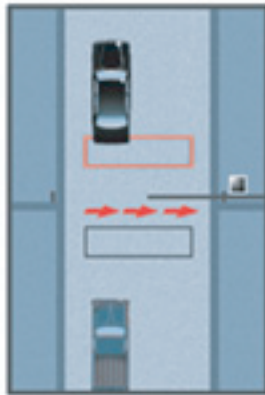

QUICK CLOSE CIRCUIT

The QCC is a function of Elites' slide gate operators that can be enabled by installation of an optional "Code Button" into the OmniOption control board sold exclusively by Elite. Recommended for large gates, 16 feet and longer, this unit is ideal for industrial applications like storage facilities, warehouses, and gated communities with a guard house. The illustrations below visually describe the effectiveness of the QCC. Picture #1: The authorized command vehicle enters and leaves the loop. Picture #2: The gate closes as the authorized vehicle clears the loop. Picture #3: Unauthorized vehicle attempts to enter, but QCC stops the gate, which forces the unauthorized vehicle to either move ahead (if there is room) or back up. QCC will not reset until the unauthorized vehicle has cleared the loop.



THE SL-3000-UL-1HP™ SERIES SLIDE GATE OPERATORS

OMNICONTROL BOARD

All new UL model Elite SL-3000-UL™ series commercial slide gate operators now use the OmniControl™ board for enhanced, reliable operation conforming to the new UL-325 and UL-991 specifications. This advanced electronic control board now offers integrated functions to make all input and outputs of the gate operator easy to access. It offers solid state motor control, spike suppressors, safety alarm and many other unique features. The new OmniControl™ board assures the latest requirements and most advanced technology in the industry, keeping all Elite commercial operators in a class by themselves.

PLUG-IN LOOP DETECTORS

These high quality loop detectors are for use with the Elite Omni Board. The electronics are manufactured exclusively for Elite by Reno A&E, a respected name in loop detection technology. With Elite's proven design and integration technology, these component detectors will make installation and maintenance of loop detection systems simple. They are available for use with the SL-3000-UL™ series for Exit Loop and Safety Loop.

STANDARD LIGHTNING PROTECTION

Elite undertook the project of protecting the Elite commercial gate operators against lightning strike with a level of protection up to a 50 foot radius of near lightning strike. The result of this project is a terminal block that has been specifically designed to prevent damage to the OmniBoard caused by lightning strike. The ability to handle high power and the fast response capability is accomplished by the use of a two-stage, hybrid network of surge suppressors integrated in the terminal block. This network of surge suppressors will protect a total of 11 lines for the gate operators (3 lines for the master/slave communication, and 8 lines for the various input commands). The 110 volt power line protection on the OmniBoard and the Plug-In Loop Detectors is built into the OmniBoard itself.




THE SL-3000-UL-1HP™ SERIES SLIDE GATE OPERATORS

OPTIONAL ITEMS FOR THE SL-3000-UL-1HP™ SLIDE GATE OPERATOR

POWER WHEELS

The 4", 5" and 6" Power Wheels™ are manufactured by a computer controlled lathe machine and made from solid, cold rolled steel. They can be used on heavy gates and never require any maintenance. Power Wheels™ are 30% more efficient in torque transfer from wheels to operator than other wheels such as cast iron or plastic. They are available in two models, the gold zinc plated Power Wheel™ or the heated treated Power Wheel 2™, for extra durability and rust resistance.

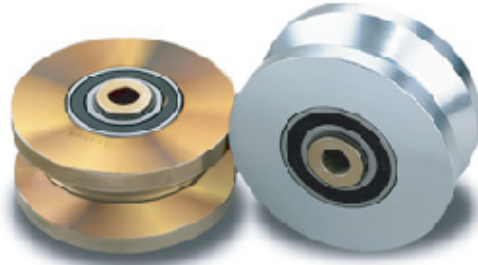

ALARM RESET BUTTON



The optional safety alarm reset button will instantly reset the built-in safety alarm siren on all new OmniControl operators, allowing normal function without waiting for the alarm status to time out.

GEARBOX HEATER

An optional gearbox heater is available to keep the gearbox running in its optimum temperature range.

