

R/Y  
R/Y  
BRAKE  
(WHEN REQ'D)





MOTOR  
O/L

TO MOTOR

40 VA  
24 VAC  
XFMR

NC  
C O/L/S NO

NC  
NO C-L/S C

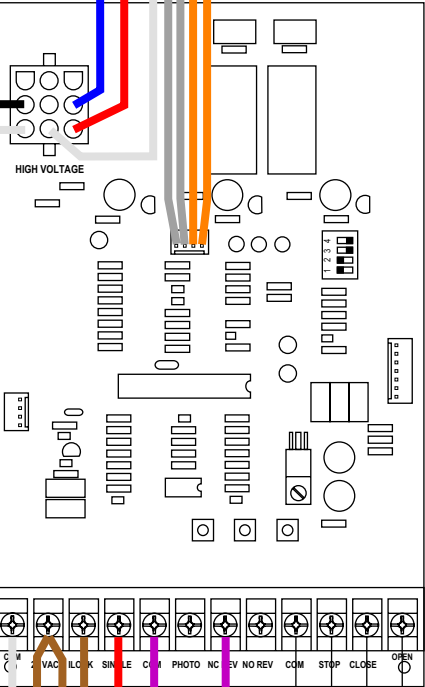

INTERNAL INTERLOCK  
WHEN REQUIRED  
(BREAKS CIRCUIT  
WHEN ACTIVATED)

NOTE: ADD JUMPER TO COM AND STOP  
TERMINALS IF NO STOP  
BUTTON IS USED.

WIRED FOR  
V, 3Ø

<b>PowerMaster</b>	
FOR USE WITH: DOOR OPERATOR WITH CDOMCB BOARD & CONTACTOR WITH THREE PHASE MOTOR	
DATE: 6/30/06	REV. 1
BY: F.S.	DOOR OPERATORS
CONTROL WIRING DIAGRAM	
WIRING DIAGRAM 6503	
© Copyright PowerMaster 2006 No portion of this diagram may be reproduced without the expressed written permission of the manufacturer.	