

Accessories



RAMSET ILD-24S Loop Detector

A safety device that stops the gate from closing on a vehicle.



RAMSET BBS-Battery Back-Up System

Opens your gate when power is lost.



RAMSET Fire Box


Allows the fire department to open your gate in the case of an emergency.



RAMSET Magnetic Lock

Secures the gate(s) closed.

| | |
|------------------------------------|--|
| RAMSET Power Inverter (RPI) | Maintains power to your operator and all connected accessories during power outages. |
| RAMSET Key Switch Box | Suitable for use on entry doors where access is restricted. |

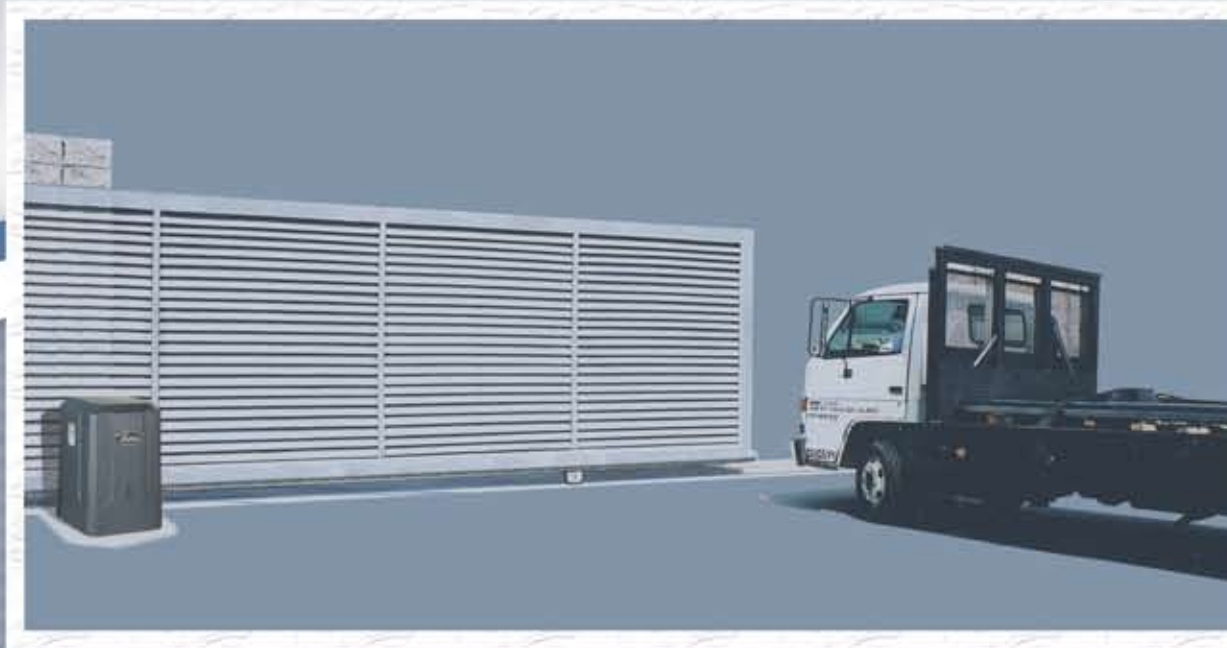

10-Year Warranty Residential

7-Year Warranty Commercial

DISTRIBUTED BY:



MADE IN THE USA

Opening the way...

- Easy Installation
- Heavy Duty
- Reliable
- Low Maintenance



RAM 5000 UL
Commercial Industrial

RAM 5100 UL
Commercial Industrial



RAM 5200 UL
Commercial Industrial



Designed to satisfy the need for gate operators in high traffic areas, such as residential gated communities, public storages, industrial parks and government facilities.

SPECIFICATIONS:

| |
|---|
| MAXIMUM GATE SIZE & WEIGHT: 40' @ 1000 lbs. |
| GATE TRAVELING SPEED: Approx. 1' per sec. |
| CYCLES: Continuous. SHIPPING WEIGHT: 125 lbs. |
| OPERATING TEMPERATURE: -10° F to 160° F |

Electric Motor:

1/2 hp, 120 VAC. 4.5 amp 50 - 60Hz, continuous duty with high speed ball bearings and resettable overload button.

Heavy Duty Worm Gear:

Lubricated in an oil bath for smooth and quiet operation.

Limit Switches:

Mechanical adjustment for accurate gate stop settings.

Finish:

Gold/Zinc plated to inhibit corrosion.

Cover:

High-impact resistant charcoal gray polyethylene.

Cover Dimensions:

H: 25" L: 16 1/2" W: 18 1/2"

RAM 5000 UL

Commercial / Industrial



SPECIFICATIONS:

| |
|---|
| MAXIMUM GATE SIZE & WEIGHT: 40' @ 2000 lbs. |
| GATE TRAVELING SPEED: Approx. 1' per sec. |
| CYCLES: Continuous. SHIPPING WEIGHT: 125 lbs. |
| OPERATING TEMPERATURE: -10° F to 160° F |

Electric Motor:

3/4 hp, 120 VAC. 8.5 amp 50 - 60 Hz, continuous duty with high speed ball bearings and resettable overload button.

Heavy Duty Worm Gear:

Lubricated in an oil bath for smooth and quiet operation.

Limit Switches:

Mechanical adjustment for accurate gate stop settings.

Finish:

Gold/Zinc plated to inhibit corrosion.

Cover:

High-impact resistant charcoal gray polyethylene.

Cover Dimensions:

H: 25" L: 16 1/2" W: 18 1/2"



RAM 5100 UL

Commercial / Industrial

RAM 5200 UL

Commercial / Industrial

SPECIFICATIONS:

| |
|---|
| MAXIMUM GATE SIZE & WEIGHT: 40' @ 3000 lbs. |
| GATE TRAVELING SPEED: Approx. 1' per sec. |
| CYCLES: Continuous. SHIPPING WEIGHT: 125 lbs. |
| OPERATING TEMPERATURE: -10° F to 160° F |

Electric Motor:

1 hp, 220 VAC. 4.5 amp 50 - 60Hz, continuous duty with high speed ball bearings and resettable overload button.

Heavy Duty Worm Gear:

Lubricated in an oil bath for smooth and quiet operation.

Limit Switches:

Mechanical adjustment for accurate gate stop settings.

Finish:

Gold/Zinc plated to inhibit corrosion.

Cover:

High-impact resistant charcoal gray polyethylene.

Cover Dimensions:

H: 25" L: 16 1/2" W: 18 1/2"



RAMSET "Intelligate" Control Board



The Intelligate control board is the most advanced gate controller in the industry, putting Ramset ahead of the competition when it comes to reliability and number of features. It is controlled by a programmable microprocessor that reads and precisely executes all functions of the control board. Some of the features of the control board include:

- * Automatic close timer
- * Pre warning alarm relays
- * Constant warning alarm relays
- * Self adjusting ERD
- * Dual gate communication capability
- * Secure close
- * Anti-tailgating/One pass system
- * Radio cycle (open, stop & close)
- * Open & close delays
- * Indicator lights for easy troubleshooting
- * Plug in loop detectors
- * Left/Right installation switch