

1833 PC PROGRAMMABLE



TELEPHONE ENTRY SYSTEM



wall mount



surface mount



anti pass back
can be programmed in different modes for complete control **into** and **out of** secured areas



stainless steel
plate and anti-vandal features protects all internal parts



pc programmable
from your PC via internet (using DKS servers), modem, or RS-232 interface




modular
design makes installation and service easy

- Provides both resident and visitor access control into and within apartment buildings, gated communities, condominiums, office buildings, factories and industrial sites
- PC programmable via internet connection (using DKS server), modem or RS-232 interface. DoorKing Remote Account Manager and Transaction Analysis software included
- Resident access control is provided by means of cards, digital PIN codes or wireless transmitters
- Visitors use the 1833 to communicate with a resident, who can then grant or deny them access from their touch-tone telephone
- Control up to 16 entry points with optional "Tracker" expansion boards
- 29 programmable security (permission) levels, each with four programmable time zones
- Elevator control option controls up to four elevators, each serving up to 64 floors

FEATURES



ACCESS CONTROL SOLUTIONS

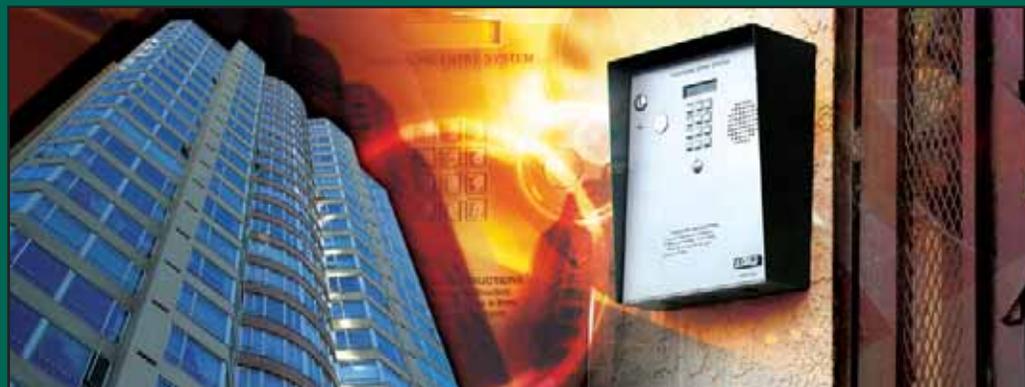



1833 PC PROGRAMMABLE TELEPHONE ENTRY

The model 1833 is an ideal telephone entry and access control system that is suited for applications that do not require a directory, or in applications where a separate directory exists. Visitors are easily identified by voice communication and can be granted or denied access directly from a touch-tone telephone. With expansion to control up to 16 entry points and 31 security (permission) levels, you will know precisely who is allowed to enter a parking area, your building, offices, pools or any other restricted area. With our elevator control option, you can even restrict which floors visitors and system users have access to.

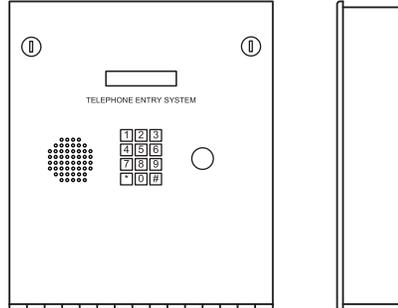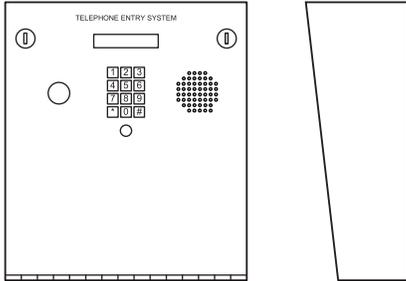

1833 Surface

11.25" W x 13" H x 4.75" D @ top 3.75" @ bottom
285mm W x 330mm H x 120.6mm D @ top
95.2mm D @ bottom

1833 Flush

12" W x 13.5" H x 2.5" D
305mm W x 343mm H x 63.5mm D
Flush mount kit: Height: 12.75" W x 14.5" H x 3.875" D
323.8mm W x 368mm H x 98.4mm D

1833 Specs

Communication

- True full duplex
- Hands free
- Optional handset (surface or flush mount only) (ADA compliant)

Mounting Styles

- Surface mount - indoor or outdoor applications
- Flush mount - indoor or protected area applications, requires flush mount kit

Capacity

- Max 3000 phone numbers, 10 area codes
- 8000 event transaction memory
- Max 8000 Weigand device, 10 facility codes, 4 digit entry codes

Door/gate control

- Three (3) expandable to 16 with tracker expansion boards

Programming Methods

- Program via internet (using DKS servers), modem, or RS232 interface with V 6.1 or later programming and transaction analysis software
- Other programming methods include system keypad and remotely from a touch tone telephone

Advanced Features

- Live Transactions (requires RS-232 connection)
- True Anti-Pass Back
- Programmable directory codes can be set from 1 to 4 digits in length
- 10 & 11 digit dialing capability
- 31 security (permission) levels, 29 programmable with 4 time zones each
- 32 holiday schedules
- Control up to 16 doors/gates with optional "Tracker" expansion boards
- Record door ajar, forced entry conditions and gate operator data with optional "Tracker"
- Elevator control option
- Built in clock/calendar
- 8 hold open time zones

Optional

- Camera Ready: Optional B&W or Color CCTV camera* can be added to the 1833
- *may require additional CCTV equipment

Operating Temp

- 10°F to 145°F
- 12°C to 62°C
- Optional heater kit available for colder climates

Electrical Requirements

- 16 VAC, 20 VA System power (350 ma)
- 16 VAC, 20 VA Weigand power
- U.L. listed power transformers provided
- Ringer equivalence: 0.0A Jack Type: RJ11C or W

Safety Standards

- FCC (US) DUF6VT-12874-OT-T
- DOC (CAN) 1736 4528 A
- Complies with UL 294
- ETL Listed

Shipping Weight

- Approximately 15-20 lbs (6.8-9 kg)

Warranty

- 2 year limited factory warranty

Distributed by:

DOORKING®, INC.
120 Glasgow Avenue, Inglewood, California 90301 U.S.A. Tel: 310-645-0023 FAX: 310-641-1586 www.doorking.com
© 2008 All Rights Reserved. Product specifications may change without notice. Rev. 8/08

