

BFT-WIFI-KPAD

RANGE


Access Control

VIDEO INTERCOM WiFi/LAN


BFT-WIFI-KPAD

Also Available:

BFT-WiFiKPAD_E



Surface Mount Model
BFT-WiFiKPAD_E




WIFI VIDEO


- Speak to, and see visitors from your smart-phone or tablet.
- Easy wireless connection to existing home wifi.
- Long range directional patch antenna at gate (up to 30-150 yards dependent on router and environmental conditions).
- Can call up to 4 devices at the same time.
- Get a video call from your gate / door even when you're away
- No SIM card, no call charges (data charges may apply when phone not connected to wifi).
- No home phone line needed.
- Less susceptible to lightning strikes - no wire in the ground.
- Get the BFT Predator Pro APP at iTunes and Google Store.
- Simple setup by mobile phone.
- Connect to the system video directly through your phone's or tablet's wifi, enter the pass code for the home hub wifi and your devices are connected.
- View the gate/door any time with monitoring mode!
- Open gates with your phone / tablet.
- Built in RJ45 Ethernet socket for CAT5 cabled installs.
- For longer range requirements-WiFi extenders or over mains extension systems-Call Bft for details.

PHYSICAL MEASUREMENTS

BFT-WIFI-KPAD

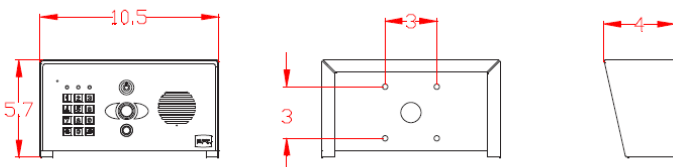

BFT-WiFiKPAD_E (SURFACE MOUNT PANEL)

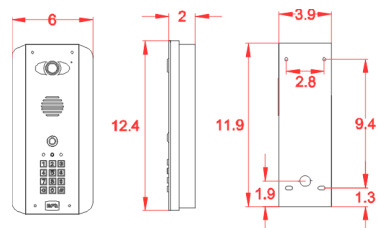

BFT Americas, Inc.
6100 Broken Sound Parkway N.W.
Boca Raton, FL 33487

T: +1 561 995 8155

T: US. 1877 995 8155

➔ info.bft@bft-usa.com

➔ www.bftaccess.com

➔ www.bftautomation.com

WIFI VIDEO

TECHNICAL DATA

BFT-WIFI-KPAD

BFT-WiFiKPAD_E

GENERAL:

Voltage: 24v dc

Recommended cable @ 25 feet: 14 gauge

Solar operable: Yes with high capacity panels

Current on standby: 90mA

Operating Current: 330mA

Peak Demand Current: 2 Amps

ANTENNA:

Frequency: 2.4GHz

Gain: 14dB

Typical range: Approx 20 yds further from router than a phone

Cable: 30 feet RG58, 50 ohm, with SMA male

Transmission Angle: 60 Degrees

CAMERA:

Color: Yes

Viewing angle: 100 degrees.

Night Vision: Yes, mono with IR illumination.

Pixels: 640x 480

KEYPAD MODULE:

Relays: 3 relays, max 2 amps, 24v ac/dc load

Latching: Yes

Codes: 1000 total

WiFi TOUCH

- TOUCH SCREEN MONITOR FOR WIFI INTERCOM.
- HAVE UP TO 4 SCREENS IN YOUR HOME, PLUS 2 PHONES*
- 10.1 INCH TOUCH SCREEN.
- 5V DC POWER SUPPLY INCLUDED.
- COMPLETE WITH BOTH WALL MOUNT BRACKET AND DESK STAND.
- APP PRE-LOADED FOR EASY SETUP
- CONNECT VIA WIFI OR RJ45 ETHERNET

*depends on capacity of home router and network.



**WiFi TOUCH sold separately.




DESK STAND



WALL MOUNT BRACKET

PHYSICAL MEASUREMENTS

WIFI-TOUCH



RJ45 socket

DC Power in



BFT Americas, Inc.
6100 Broken Sound Parkway N.W.
Boca Raton, FL 33487

T: +1 561 995 8155

T: US. 1877 995 8155

➔ info.bft@bft-usa.com

➔ www.bftaccess.com

➔ www.bftautomation.com